CHALLENGER	AGA CERTIFIED BRASS BALL VALVE	MODEL BRB

FEATURES

- SIZE RANGE: 8MM - 100MM
- AGA APPROVED
- Pressure / Temp for GAS: 1050kPa / 0°C to 60°C
- Pressure / Temp for Liquid: 2500kPa / 0°C to 100°C
- THREADS: Rp-R-ISO 7/1
- AGA CERTIFICATE: 6402

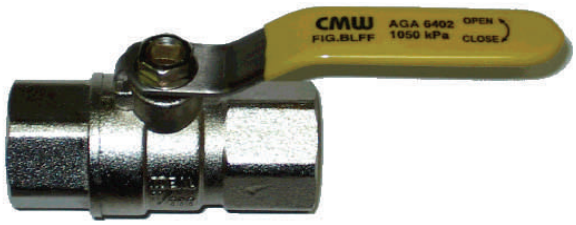

CMW – IDEAL Figure No's –

BLFF Lever Handle operation, internal thread connections
BTFF 'T' Handle operation, internal thread connections
BLMF Lever Handle operation, internal / external thread connections
BTMF 'T' Handle operation, internal / external thread connections

ITEM	COMPONENT	MATERIAL (ASTM)
1	BODY	BRASS—NICKEL PLATE (C37700) AS1567
2	BALL	BRASS—CHROME PLATE (C37700) AS1657
3	BALL SEAT	PTFE
4	SPINDLE SEAL	NITRILE
5	LEVER HANDLE	STAINLESS STEEL

F&F

(ALSO AVAILIBLE T-HANDLE)

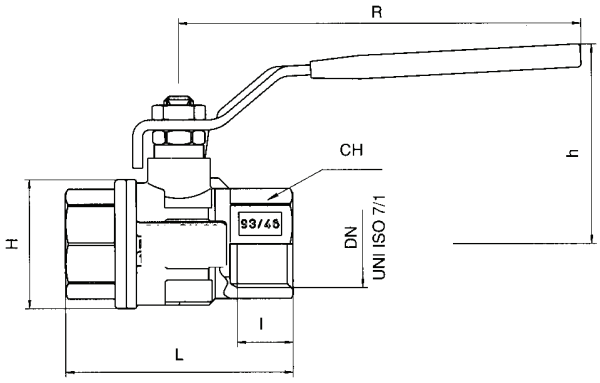

M&F

(ALSO AVAILIBLE T-HANDLE)

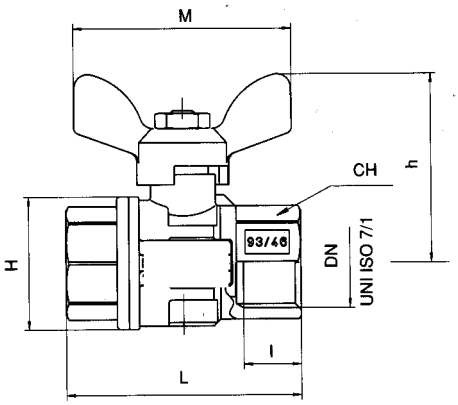

DIMENSIONS											
SIZE MM	8	10	15	20	25	32	40	50	65	80	100
FACE TO FACE F&F - L	46.7	49.9	66.8	73.8	84.5	95.6	109.2	127.8	148.7	168.1	189
FACE TO FACE M&F - L	55.1	58.9	76	82.9	94.4	105.5	120.5	139.8			